


# PRS 18 TOWER SETUP

# QuickStart Instructions




1. All parts above are the parts required to make the PRS 18 tower. There is the popup tower, 9 channel bars, 3 panels, and lights. All of this parts are all part of the tower.

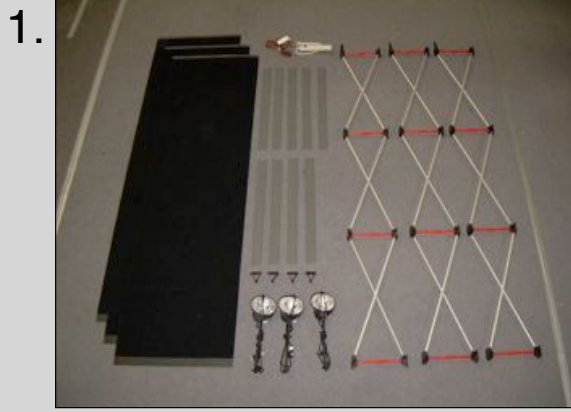

2. Take the tower out of the case and pop it out. The hub with the yellow goes on the bottom and the the hub with black faces the top.




3. Lock the red hinges together to keep the tower stable.

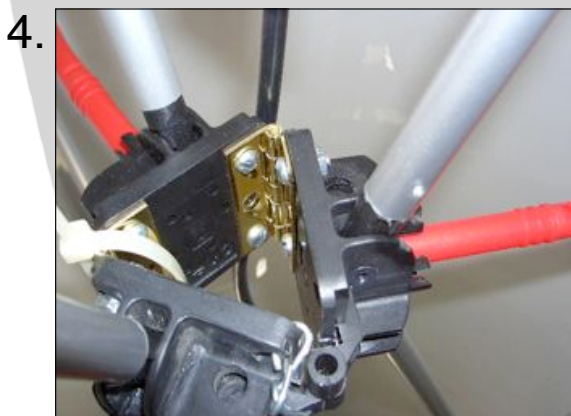

4. Each tower has an opening on the hubs that allows the tower to pop in and out for assemble and packing.



5. Each tower comes with a yellow pin (4) and that is attached to the hub with a Jack chain. This pin will go through the opening of the that the hubs have.

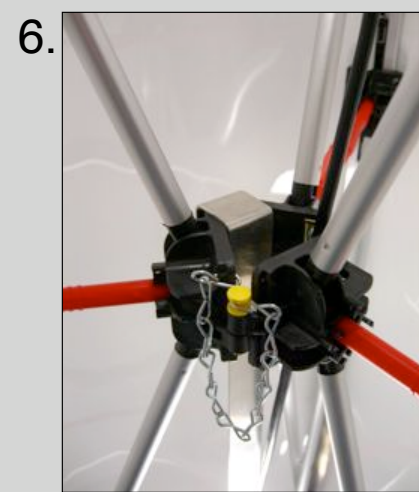


6. Insert the yellow pin that is attached to the jack chain into the hole. There is a total of 4 pins throughout the tower.



7. Place the channel bars on the tower. The channel bars are keep in place when they are lock with the hubs of the tower.



8. If tower is backlit take the light bracket assembly and hang it inside the tower before the panels are hang to the tower.

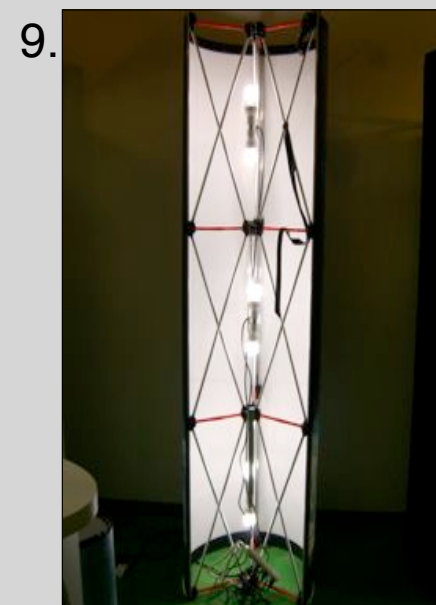

9. Each tower that will be backlit will have three of the light bracket assembly inside the tower.



10. Place all panels on the tower. Each tower takes three panels.



11. If tower is frontlit take the lights and place them on top of the tower after all three panels have been place.